

PRODUCT CATALOG



 **LUBMAX®**

PRODUCT INDEX

1.	MOTOR OIL	3
	HeavyLife Extra	3
	HeavyLife Extra LE	4
	HeavyLife Extra LD	5
	HeavySynt LS	6
	HeavySynt LS-MIX	7
	DuraLife Extra	8
	DuraSynt LS	9
2.	HYDRAULIC OIL	10
	Hydraflow Ultra	10
	Hydraflow Super	11
	Hydraflow POC	12
	HydraFood	13
3.	TRANSMISSION OIL	14
	TransHyd Extra	14
	TransTerra	15
	TransGuard GR4	16
	TransGuard GR5	17
	TransGuard 5R	18
	TransGuard HT	19
	TransGuard LS5	20
	TransMASTER ATF	21
4.	COTTON PICKER GREASE	22
	AM57 [®] SUPREME	22
5.	COTTON SPINDLE CLEANER	23
	CSC Supreme	23
6.	CHAINSAW OIL	24
	Bar & Chain Lube	24



HEAVYLIFE EXTRA


MOTOR OIL

HEAVYLIFE EXTRA Series by **LUBMAX LUBRICANTS** is an conventional and synthetic blend oils for engines without gas treatment and post-treatment systems in heavy duty engines, agriculture and truck and bus.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

HEAVYLIFE EXTRA	SAE 10W30	ACEA E7; API CI-4; CATERPILLAR ECF-2, ECF-1-A; CUMMINS CES 20078; MAN M3275-1; DEUTZ DQC III-10; MB 228.3; MTU TYPE 2; VOLVO VDS-3; RENAULT RLD/RLD-2; MACK EO-N, EO-M PLUS <i>FULL SYNTHETIC</i>
	SAE 10W40	

HEAVYLIFE EXTRA	SAE 15W30	ACEA E7; API CI-4; CATERPILLAR ECF-2, ECF-1-A; CUMMINS CES 20078; MAN M3275-1; DEUTZ DQC III-10; MB 228.3; MTU TYPE 2; VOLVO VDS-3; RENAULT RLD/RLD-2; MACK EO-N, EO-M PLUS
	SAE 15W40	

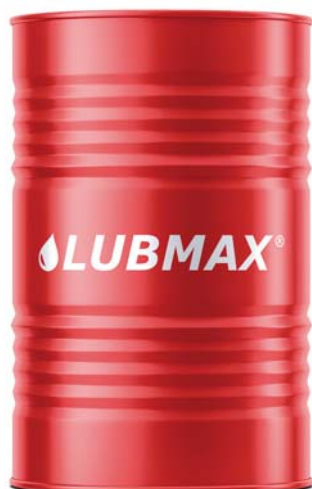



HEAVYLIFE EXTRA LE

MOTOR OIL




HEAVYLIFE EXTRA LE Series by **LUBMAX LUBRICANTS** is a conventional oils for engines with gas treatment and post-treatment systems in heavy duty engines, agriculture and truck and bus.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

LUBMAX HEAVYLIFE EXTRA LE, it is ideal for engines where **ACEA E9 or E7** specification is required.

HEAVYLIFE EXTRA LE	SAE 15W40	ACEA E7 / E9; API CI-4; CATERPILLAR ECF-3; CUMMINS 20081; MAN 3575; MB 228.31; VOLVO VDS-4; RENAULT RLD-3
HEAVYLIFE EXTRA LE	SAE 15W30	ACEA E7 / E9; API CI-4; CATERPILLAR ECF-3; CUMMINS 20081; MAN 3575; MB 228.31; VOLVO VDS-4; RENAULT RLD-3

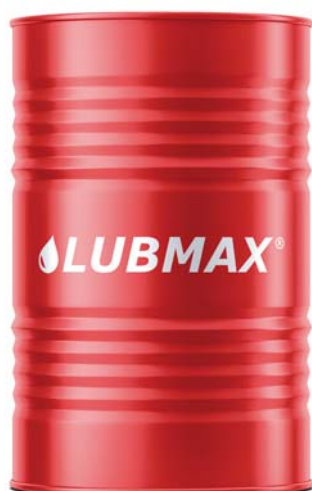




HEAVYSYNT LD Series by LUBMAX LUBRICANTS they are fully synthetic motor oils for long periods of drainage in heavy equipment, trucks and buses.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

LUBMAX HEAVYSYNT LD, it is ideal for engines where ACEA E4 or E7 specification is required.

HEAVYSYNT LD	SAE 15W40	ACEA E7 / E9; API CI-4 PLUS / CJ-4; JASO DH-2; CATERPILLAR ECF-3; DETROIT DIESEL 93K218; MAN M 3575; MB 228.31; MB 228.3; MTU TYPE 1 & 2; VOLVO VDS-4; MACK EO-O PREMIUM PLUS; RENAULT RLD-3
HEAVYSYNT LD	SAE 15W30	ACEA E7 / E9; API CI-4 PLUS / CJ-4; JASO DH-2; CATERPILLAR ECF-3; DETROIT DIESEL 93K218; MAN M 3575; MB 228.31; MB 228.3; MTU TYPE 1 & 2; VOLVO VDS-4; MACK EO-O PREMIUM PLUS; RENAULT RLD-3
HEAVYSYNT LD	SAE 10W40	ACEA E7 / E9; API CI-4 PLUS / CJ-4; JASO DH-2; CATERPILLAR ECF-3; DETROIT DIESEL 93K218; MAN M 3575; MB 228.31; MB 228.3; MTU TYPE 1 & 2; VOLVO VDS-4; MACK EO-O PREMIUM PLUS; RENAULT RLD-3
HEAVYSYNT LD	SAE 10W30	ACEA E7 / E9; API CI-4 PLUS / CJ-4; JASO DH-2; CATERPILLAR ECF-3; DETROIT DIESEL 93K218; MAN M 3575; MB 228.31; MB 228.3; MTU TYPE 1 & 2; VOLVO VDS-4; MACK EO-O PREMIUM PLUS; RENAULT RLD-3
HEAVYSYNT LD	SAE 5W40	ACEA E7 / E9; API CI-4 PLUS / CJ-4; JASO DH-2; CATERPILLAR ECF-3; DETROIT DIESEL 93K218; MAN M 3575; MB 228.31; MB 228.3; MTU TYPE 1 & 2; VOLVO VDS-4; MACK EO-O PREMIUM PLUS; RENAULT RLD-3

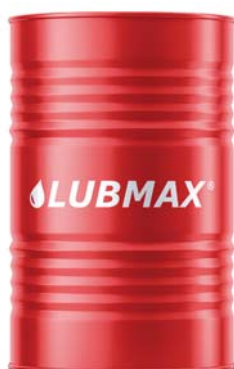



HEAVYSYNT LS

MOTOR OIL




HEAVYSYNT LS Series by **LUBMAX LUBRICANTS** is full synthetic oils for engines with gas treatment and post-treatment systems in heavy duty engines, agriculture and truck and bus.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

LUBMAX HEAVYSYNT LS, it is ideal for fleets with engines from different manufacturers, where the product is considered a multipurpose solution and specially **LOW SAPS** specifications.

HEAVYSYNT LS	SAE 5W30	ACEA E6 / E7 / E9; API CJ-4; JASO DH-2; MAN M 3691 / M 3677; MB 228.51; SCANIA LA LOW ASH; RENAULT RLD-3; MACK EO-O PLUS; CUMMINS CES 20081; DEUTZ DQC IV-10 LA; IVECO 18-1804 TLS E6; MTU TYPE 3.1; VOLVO VDS-4
---------------------	-------------	--

HEAVYYNT LS	SAE 10W40	ACEA E6 / E7 / E9; API CJ-4; MAN M 3477; MB 228.51; MB 228.31; RENAULT RLD-3; MACK EO-O PLUS; CUMMINS CES 20081; DEUTZ DQC IV-10 LA; MTU TYPE 3.1; VOLVO VDS-4
--------------------	--------------	--

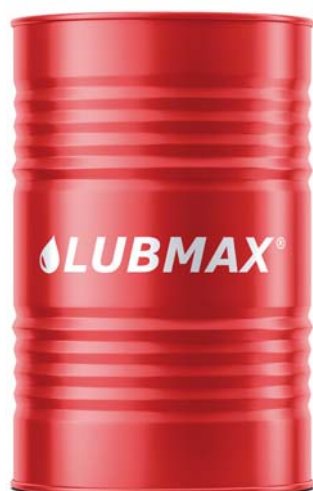



HEAVYSYNT LS-MIX

MOTOR OIL


HEAVYSYNT LS-MIX Series by **LUBMAX LUBRICANTS** is full synthetic oils for engines with gas treatment and post-treatment systems in heavy duty engines, agriculture, truck and bus.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

LUBMAX HEAVYSYNT LS-MIX, it is ideal for fleets with engines from different manufacturers, where the product is considered a multipurpose solution.

HEAVYSYNT LS-MIX	SAE 5W30	ACEA E6 / E7 / E9; API CJ-4; JASO DH-2; MAN M 3691 / M 3677; MB 228.51; SCANIA LA LOW ASH; RENAULT RLD-3; MACK EO-O PLUS; CUMMINS CES 20081; DEUTZ DQC IV-10 LA; IVECO 18-1804 TLS E6; MTU TYPE 3.1; VOLVO VDS-4
-----------------------------	-------------	--

HEAVYNT LS-MIX	SAE 10W40	ACEA E6 / E7 / E9; API CJ-4; MAN M 3477; MB 228.51; MB 228.31; RENAULT RLD-3; MACK EO-O PLUS; CUMMINS CES 20081; DEUTZ DQC IV-10 LA; MTU TYPE 3.1; VOLVO VDS-4
---------------------------	--------------	--

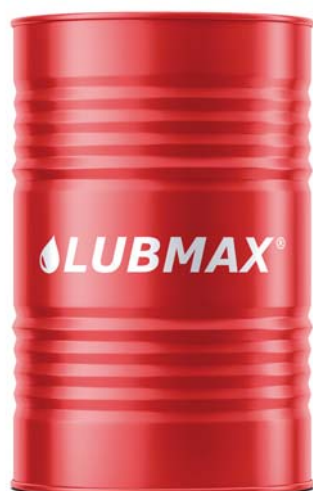




DURALIFE EXTRA

MOTOR OIL

DuraLife Extra Series by **LUBMAX LUBRICANTS** is a high quality oils for engines of passenger cars, vans and small trucks.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

DURALIFE EXTRA	SAE 15W40	ACEA A3 / B3; API: SL / CF; MB 229.1; VW 501.00 / 505.00; FIAT 9.55535.D2
DURALIFE EXTRA	SAE 10W40	ACEA A3 / B4; API: SM, SN/CF; MB 229.3; PSA B71 2300; RENAULT RN0700/ RN0710; VW 50200/50500; FIAT 9.55535.D2 AND G2
DURALIFE EXTRA MS	SAE 5W40	ACEA C3; API: SM, SN/CF; MB 229.31; BMW LL 04; VW 505.00 / 505.01; FORD WSS-M2C917-A; RENAULT RN0700/0710 <i>MID SAP</i>
DURALIFE EXTRA MS	SAE 5W30	ACEA C3; API: SM, SN/CF; MB 229.31; BMW LL 04; VW 505.00 / 505.01; FORD WSS-M2C917-A; RENAULT RN0700/0710 <i>MID SAP</i>

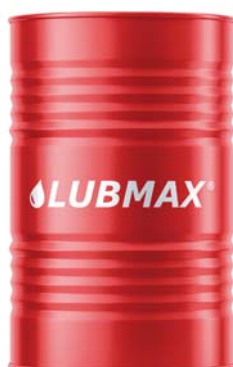




DURASYNT LS

MOTOR OIL

DURASYNT LS Series by **LUBMAX LUBRICANTS** is full synthetic oils for engines with gas treatment and post-treatment systems in passenger cars, vans and small trucks.

The products are formulated with high quality base oils to provide stability and long life to the oil in a wide range of temperatures, it also contains anti-wear properties and rust and oxidation inhibitors to guarantee a high protection against corrosion.

DURASYNT LS20	SAE 5W30	ACEA C2; ACEA A5/B5 – A1/B1; API: SN/CF; PSA B712290; RENAULT RN0700; FIAT 9.55535.S1
DURASYNT LS40	SAE 5W30	ACEA C4; MB 226.52; RENAULT RN0720
DURASYNT LS12	SAE 5W30	ACEA C1 AND C2; FORD WSS-M2C934-B
DURASYNT LS32 LL	SAE 5W30	ACEA C3 AND C2; MB 229.51; VW 504.00 / 507.00; MB 229.31; BMW LL 04; PORSCHE C30
DURASYNT LS32	SAE 5W30	ACEA C3 AND C2; API SN / CF; MB 229.52; MB 229.51; BMW LL 04; GM DEXOS 2; VW 502.00 / 505.00 / 505.01
DURASYNT LS30	SAE 5W30 SAE 5W40	ACEA C3; API SN / CF; MB 229.51; BMW LL 04; GM DEXOS 2; VW 502.00 / 505.00 / 505.01

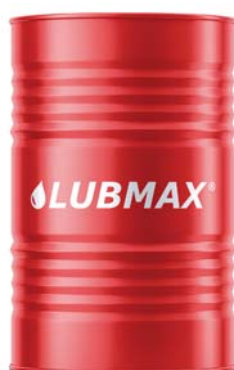



HYDRAFLOW ULTRA


HYDRAULIC OIL



HYDRAFLOW ULTRA Series by **LUBMAX LUBRICANTS** is a fluid for hydraulic systems, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of hydraulic applications.

LUBMAX HYDRAFLOW ULTRA hydraulic anti wear oils (AW) are prepared to meet the main demands of the sector. This range of high viscosity index (HVI) hydraulic oils offers superior anti-wear protection compared to other products on the market and service performance even in extreme weather conditions.

SUPER HVLP	ISO 15 ISO 22 ISO 32 ISO 46 ISO 68 ISO 100	DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; US STEEL 126, 127, 136; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70; GENERAL MOTORS LS2
SUPER RRD HVLP	ISO 46 ISO 68	DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; US STEEL 126, 127, 136; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70; GENERAL MOTORS LS2 <small>COLOR RED, IDEAL FOR EASILY DETECTING LEAKS, CAN BE USED AS A FIRST FILL SERVICE OR REPLACEMENT SERVICE IN ANY EQUIPMENT THAT REQUIRES THE SPECIFICATIONS DESCRIBED.</small>
SUPER XBE HVLP	ISO 46 ISO 68	DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; US STEEL 126, 127, 136; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70; GENERAL MOTORS LS2 <small>COLOR BLUE, IDEAL FOR EASILY DETECTING LEAKS, CAN BE USED AS A FIRST FILL SERVICE OR REPLACEMENT SERVICE IN ANY EQUIPMENT THAT REQUIRES THE SPECIFICATIONS DESCRIBED.</small>

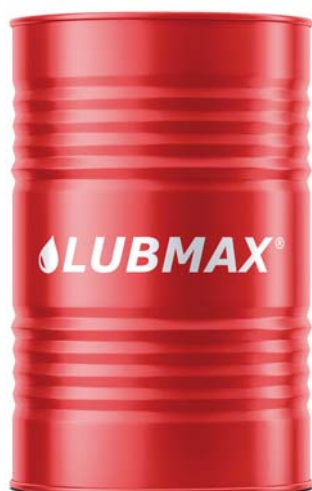



HYDRAFLOW SUPER

HYDRAULIC OIL


HYDRAFLOW SUPER Series by **LUBMAX LUBRICANTS** is a fluid for hydraulic systems, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of hydraulic applications.

LUBMAX HYDRAFLOW SUPER hydraulic anti wear oils (AW) are prepared to meet the main demands of the sector. This range of medium viscosity index (MVI) hydraulic oils offers superior anti-wear protection compared to other products on the market and service performance even in extreme weather conditions.

SUPER HLP	ISO 22 ISO 32 ISO 46 ISO 68 ISO 100	DIN 51524 HLP; ASTM D6158 HM; ISO 11158 HM; BOSCH REXROTH RDE 90240; US STEEL 126, 127, 136; JCMAS HK P041; GENERAL MOTORS LS2; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70
------------------	---	--

SUPER RRD HLP	ISO 46 ISO 68	DIN 51524 HLP; ISO 11158 HM-HLP; ASTM D6158 HM-HLP; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70
COLORED RED , IDEAL FOR EASILY DETECTING LEAKS, CAN BE USED AS A FIRST FILL SERVICE OR REPLACEMENT SERVICE IN ANY EQUIPMENT THAT REQUIRES THE SPECIFICATIONS DESCRIBED.		

SUPER XBE HLP	ISO 46 ISO 68	DIN 51524 HLP; ISO 11158 HM-HLP; ASTM D6158 HM-HLP; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70
COLORED BLUE , IDEAL FOR EASILY DETECTING LEAKS, CAN BE USED AS A FIRST FILL SERVICE OR REPLACEMENT SERVICE IN ANY EQUIPMENT THAT REQUIRES THE SPECIFICATIONS DESCRIBED.		

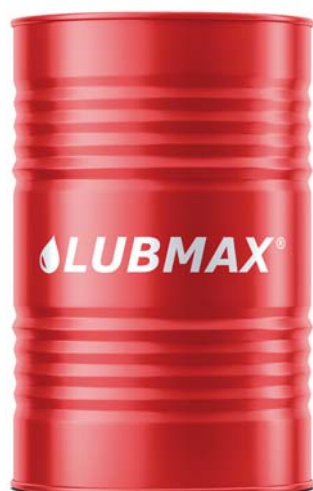



HYDRAFLOW POC

HYDRAULIC OIL

HYDRAFLOW POC by **LUBMAX LUBRICANTS** is a fluid for Case Poclain hydraulic systems, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of hydraulic and powertrain applications.

LUBMAX HYDRAFLOW POC is especially recommended for mining machinery where POCLAIN quality level (P00552-13P) or similar is required. They are formulated with high quality first refining base oils to provide stability and long life to oil over a wide range of temperatures. Lubmax Hydraflow POC oil contains anti-wear properties and rust and oxidation inhibitors to ensure high protection against corrosion.

POC

SAE 10W
10W-20

DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; POCLAIN P1103203J; VICKERS I286S & M2950S





HYDRAFOOD

HYDRAULIC OIL




HYDRAFOOD & HYDRAFOOD SYN by **LUBMAX LUBRICANTS** is a white medicinal fluid for hydraulic systems, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of hydraulic applications. It is indicated for environments where accidental contact with food is possible.

LUBMAX HYDRAFOOD hydraulic anti wear oils (AW) are prepared to meet the main demands of the sector. *This range of medium viscosity index (MVI) hydraulic oils offers superior anti-wear protection compared to other products on the market and service performance even in extreme weather conditions.*

LUBMAX HYDRAFOOD SYN hydraulic anti wear oils (AW) are prepared to meet the main demands of the sector. *This range of high viscosity index (HVI) hydraulic oils offers superior anti-wear protection compared to other products on the market and service performance even in extreme weather conditions.*

	HYDRAFOOD	ISO 32 ISO 46 ISO 68	DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; US STEEL 126, 127, 136; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70; GENERAL MOTORS LS2
		ISO 32 ISO 46 ISO 68	DIN 51502 HVLP; ISO 6743-4 HR & HV; AFNOR 48-603 HV; DIN 51524 3 HVLP; ISO 11158 HV; US STEEL 126, 127, 136; BOSCH REXROTH RDE 90240; PARKER DENISON HF-0; FIVES CINCINNATI P-68, P-69, P-70; GENERAL MOTORS LS2

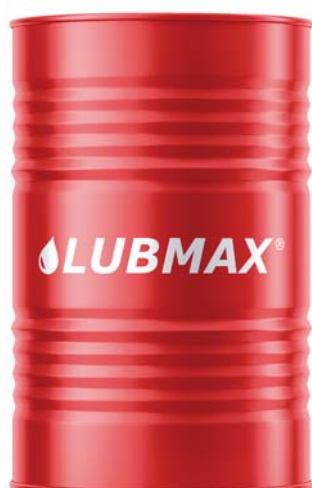



TRANSHYD EXTRA

TRANSMISSION OIL




TRANSHYD EXTRA Series by **LUBMAX LUBRICANTS** is a high performance UTTO fluid for use in transmissions, hydraulic systems, oil immersed brakes of tractors and off-road equipment.

LUBMAX TRANSHYD EXTRA is based on high quality conventional base oil in combination with an unique additive package to ensure the following properties:

- Noise free operation of wet brakes.
- Effective lubrication at low ambient temperatures.
- Robust anti-wear and extreme pressure properties.
- Multipurpose capability reduces inventory.

85W	SAE 20W-30	API GL-4; JOHN DEERE J20C; FORD M2C86B/C; FORD M2C134D; CASE MS 1204/6/7/9; CNH MAT 3525/3526; MF M1135/M1143/M1145; CATERPILLAR TO-2; VOLVO WB101; ALLISON C4; JCMAS HK P-041; EATON M-2950S; EATON I-280-S
------------	---------------	--

80W	SAE 10W-30	API GL-4; JOHN DEERE J20C / J20D; FORD M2C86A/B; FORD M2C134D; ALLISON C-4; CATERPILLAR TO-2; CASE MS 1204/6/7/9; MASSEY FERGUSON M1135/1143/1145; VOLVO WB101 (97303); VALTRA G2-08 / G2-B10; ZF TE-ML 03E/05F/06K; EATON M2950S; EATON I-280-S; JCMAS HK P-041; KUBOTA UDT FLUID; NEW HOLLAND H410B, NH420A; CNH MAT 3525/3526
------------	---------------	--

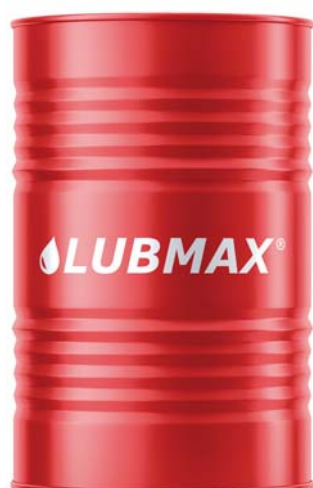



TRANSTERRA

TRANSMISSION OIL

TRANSTERRA Series by **LUBMAX LUBRICANTS** is formulated with high refined solvent mineral base stock in combination with a special additive package to reach the following properties.

LUBMAX TRANSTERRA is specifically designed for powershift transmissions, final drives and wet brakes on heavy duty off-highway equipment used in earthmoving, mining logging, road transport and agricultural applications.

TO-4	SAE 50 SAE 60	CATERPILLAR TO-4; KOMATSU KES 07.868.1; TREMAC/ TTC; API CF-2/CF
TO-4	SAE 30	CATERPILLAR TO-4; KOMATSU KES 07.868.1; ALLISON C-4; API CF-2/CF; ZF TE-ML 03C; DANA POWERSHIFT TRANSMISSIONS; ZF TE-ML 07F
TO-4	SAE 10W	CATERPILLAR TO-4; KOMATSU KES 07.868.1; ALLISON C-4; API CF-2/CF; ZF TE-ML 03C; DANA POWERSHIFT TRANSMISSIONS; VICKERS 35VQ25





TRANSGUARD GR4 by **LUBMAX LUBRICANTS** is a gear oil, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of transmission applications.

LUBMAX TRANSGUARD GR4 is a mid pressure gear lubricant formulated for use in automobiles, trucks, heavy duty differentials, farm, and construction equipment that call for an API GL-4 type product.

GR4	SAE 90	API GL-4 ZF TE-ML 08, 24A
GR4	SAE 75W-90	API GL-4 BMW MTF LT-4 GM 1940182, 1940764, 1940768 <i>FULL SYNTHETIC</i>
GR4	SAE 85W-90	API GL-4 ZF TE-ML 08, 24A
GR4	SAE 80W-90	API GL-4 ZF TE-ML 08, 24A
GR4	SAE 75W-80	API GL-4; MAN 341 Z-4; ZF TE-ML 01L, 02L, 16K MAN 341 E-3; ZF TE-ML 08, 13; VOLVO 97305 <i>FULL SYNTHETIC</i>
GR4	SAE 80W	API GL-4 ZF TE-ML 08
GR4	SAE 75W	API GL-4; BMW MTF LT-3; FORD WSS-M2C 186-A; FORD WSS-M2C 200-D2; GM 1940004 / 19259104 / 1940764; VW G 052 171, G 052 178; VW G 052 512, G 052 527 A2; VW G 052 726, G 055 726; VW G 060 726, VW G 070 726 A2 <i>FULL SYNTHETIC</i>






TRANSGUARD AX5

TRANSMISSION OIL

TRANSGUARD AX5 by **LUBMAX LUBRICANTS** is a gear oil, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of transmission applications.

LUBMAX TRANSGUARD AX5 is a extreme pressure (EP) gear lubricant formulated for use in automobiles, trucks, heavy duty differentials, farm, and construction equipment that call for an API GL-5 type product.

AX5	SAE 85W-140	API: GL-5 ZF TE-ML 07A, 08
AX5	SAE 85W-90	API: GL-5 ZF TE-ML 07A, 08, 24A
AX5	SAE 80W-90	API: GL-5 ZF TE-ML 07A, 08, 24A

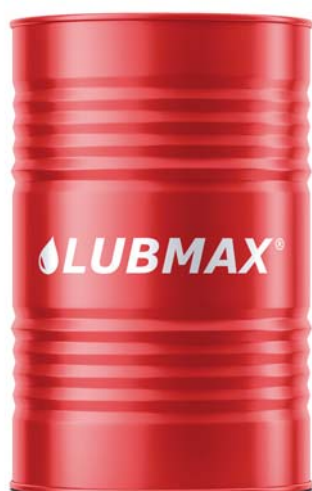



TRANSGUARD 5R

TRANSMISSION OIL

TRANSGUARD 5R by **LUBMAX LUBRICANTS** is a gear oil, formulated with high quality base oils and anti-wear additives to offer solid performance in a wide range of transmission applications.

LUBMAX TRANSGUARD 5R with **Red Tack** is a sulphur-phosphorus, heavy duty extreme pressure (EP) gear lubricant formulated for use in automobiles, trucks, heavy duty differentials, farm, and construction equipment that call for an API GL-5 type product. Formulated from high VI paraffin base oil with a legacy additive package which is further fortified with a tackiness agent which provides excellent adhesion to gear sets.

5R

SAE
85W-140

API GL-5
ZF TE ML 07A / 08

GR4

SAE
80W-90

API GL-5
ZF TE ML 07A / 08





TRANSGUARD HT

TRANSMISSION OIL

TRANSGUARD HT Series by **LUBMAX LUBRICANTS** is an special high performance gear oil boosted with polymers for use in manual transmission en transaxles of passenger cars, vans, light- and heavy commercial vehicles, off-highway equipment, mining and agriculture.

LUBMAX TRANSGUARD HT offers value through:

- High thermal- and oxidation stability.
- Effective rust, wear and corrosion protection.
- Fuel Economy properties.
- Good anti-foam for effective lubrication.
- Excellent seal compatibility.

HT5	SAE 85W-140	API: GL-5
HT4	SAE 85W-90	API: GL-4





TRANSGUARD LS5 Series by **LUBMAX LUBRICANTS** is an extra high performance extreme pressure type automotive gear lubricant specially developed for use in modern high performance passenger cars, sports utility vehicles, vans and light duty trucks with limited slip differentials.

LUBMAX TRANSGUARD LS5 is based on high quality base oil in combination with a special additive package

to ensure the following properties:

- Exceptional thermo-oxidative stability.
- Effective rust and corrosion protection.
- Exceptional load bearing characteristics.
- Excellent limited slip performance.
- Improved fuel economy and smoother shift ability

LS5	SAE 85W-140	API GL 5; MIL PRF 2105D; MAN 342 M1/M2; MB 235.0; VOLVO 97310; ZF TE-ML 05C, 12C, 16E, 21
------------	----------------	---

LS5	SAE 75W-140	API GL 5; MIL PRF 2105D; MAN 342 M1/M2; MB 235.0; VOLVO 97310; ZF TE-ML 05C, 12C, 16E, 21 <i>FULL SYNTHETIC</i>
------------	----------------	--

LS5	SAE 85W-90	API GL-5; MAN 342 M1/M2; VOLVO 1273.10; MIL-L-2105D; ZF TE-ML 05C, 07A, 08, 12E, 16E, 17B, 19B, 21C
------------	---------------	---

LS5	SAE 80W-90	API GL-5; MAN 342 M1/M2; VOLVO 1273.10; MIL-L-2105D; ZF TE-ML 05C, 07A, 08, 12E, 16E, 17B, 19B, 21C
------------	---------------	---

LS5	SAE 75W-90	API GL-5; MAN 342 M1/M2; VOLVO 1273.10; MIL-L-2105D; ZF TE-ML 05C, 07A, 08, 12E, 16E, 17B, 19B, 21C <i>FULL SYNTHETIC</i>
------------	---------------	--



TRANSMaster ATF Series by **LUBMAX LUBRICANTS** is a lubricating fluid for use in automatic and semi-automatic transmissions, hydraulic systems, torque converters and power steering with anti-wear additives of the highest quality and with a high viscosity index.

LUBMAX TRANSMaster ATF is formulated with high quality base oils to provide stability and long life to oil over a wide range of temperatures. Contains anti-wear properties and rust and oxidation inhibitors to ensure high protection against corrosion.

MULTI VI	SAE 85W-140	GM DEXRON VI; ALLISON TES 389 C-4; FORD MERCON SP / V / LV; HONDA ATF-Z1, DW1 (EXCEPT IN CVTS); HYUNDAI/KIA SP-II, SP-III, SP-IV, SPH-IV, SP4-M, SP-IV-RR; AISIN WARNER JWS 3309; JASO 1A; MAZDA M-V, FZ; MB 236.1, MB236.6, MB236.7, MB236.9, MB236.10, MB236.12, MB 236.14, MB 236.15; MOPAR AS68RC ATF; NISSAN MATIC-D/J/K/S/W; SUBARU ATF-HP; TOYOTA TYPE T, T-III AND T-IV / WS; VOLVO 1161521, 1161540, STD 1273.41, 97340; VW TL52162, LT71141; ZF TE-ML-14B, 16L, 17C; ZF LIFE GUARD FLUID 6 & 8 (EQUIVALENT)
MULTI	SAE 85W-90	GM DEXRON III G / III H; ALLISON C4; FORD MERCON V / MERCON SP; WSS-M2C-195; CHRYSLER ATF + 3, ATF +4; MB 236.9/10/11/12; HYUNDAI / KIA RED 1; MITSUBISHI ATF J2 SPIII & PSF 3; JASO 1A; NISSAN ATF FMS, MATIC S & MATIC J; HONDA Z-1; TOYOTA ATF WS & ATF TYPE T-IV; AISIN WARNER JWS 3309.
MB15	SAE 85W-140	MB 236.15
MB14	SAE 85W-90	MB 236.14 MB 236.12
DEX MERC IIIIR	SAE 85W-140	GM DEXRON III; FORD MERCON; ALLISON C-4; VOLVO 97325, 97335, 97340; ZF TE-ML 05L, 09, 11A, 11B.
DX II DR	SAE 85W-90	GM II D (DEXRON II-D); FORD MERCON MB 236.1; MAN 339 TYPE V1, Z1, L2; ZF TE ML 03D, 04D, 05L, 09, 11A, 14A, 17C, 21L; VOITH H55633533; CATERPILLAR TO-2; ALLISON C4





AM57'SUPREME

COTTON PICKER GREASE

AM 57' SUPREME by **LUBMAX LUBRICANTS**, Cotton Picker Grease is a high performance, lithium complex grease specifically designed for high speed spindles and heads found on cotton pickers.

LUBMAX AM57' SUPREME starts with premium base oils that help retain performance, lubrication, and film consistency in extreme temperatures. The base oils are combined with a lithium soap complex that resists caking on the picker bars which can prevent proper lubrication of the picking assembly.

AM 57' SUPREME uses a state-of-the art additive package that includes antiwear additives and rust inhibitors, extending the service life of your cotton picker's moving parts and preventing costly downtimes during harvest.

AM57'SUPREME	COTTON PICKER GREASE	OHN DEERE JDN-380
		JOHN DEERE JDN-360





CSC SUPREME

COTTON SPINDLE CLEANER

CSC SUPREME by **LUBMAX LUBRICANTS** Spindle Cleaner meets or exceeds most major OEM requirements for use in cotton pickers.

LUBMAX CSC SUPREME is specifically formulated to extend the life of your spindles by protecting them from premature rust and corrosion without reducing the grade of your cotton, provides a protective lubricating film that considerably decreases the roping of cotton helping maintain the picking efficiency from start to finish.

CSC SUPREME

SPINDLE
CLEANER

ADD THE CSC SUPREME TO THE WATER AT A RATIO OF 1 GALLON OF CLEANER TO 100 GALLONS OF WATER.





BAR & CHAIN LUBE

CHAINSAW OIL



BAR & CHAIN LUBE by **LUBMAX LUBRICANTS** is a lubricating fluid for use in chains, bars, guides and chainsaws with high quality anti-wear additives and with greasy improvers to facilitate adhesion.

LUBMAX BAR & CHAIN LUBE is formulated with high quality base oils to provide oil stability and adhesion in applications where speed of movement is a problem. Lubmax Bar & Chain Lube oil contains anti-wear properties and rust and oxidation inhibitors to ensure high protection against corrosion. Lubmax Bar & Chain Lube fluid offers value through:

Resistance to oxidation and corrosion.

High adhesion.

Total compatibility with various sealing materials

**BAR & CHAIN
LUBE**

CHAINSAW
OIL

HUSQVARNA

STIHL





DISTRIBUTED BY LUBMAX LUBRICANTS S.L.

FOR MORE INFORMATION, VISIT:

WWW.LUBMAXLUBES.COM

24-HOUR EMERGENCY NUMBER TEL.: + 1 800 825 8654

LUBMAX® IS A REGISTERED BRAND IN VARIOUS COUNTRIES.

WWW.LUBMAXLUBES.COM